SDC-SW

ELETTROPOMPA SOMMERSA PER ACQUA MARINA
SUBMERSIBLE PUMP FOR SEA WATER

LIMITI D'IMPIEGO
- Temperatura liquido fino a 35°C (per un uso domestico secondo EN 60335-2-41) Temperatura max. liquido: 35°C (per altri impieghi)
- Profondità d'immersione 5 mt.
- Passaggio solidi Ø 4 mm
- Livello min. d'aspirazione 20 mm

MOTORE
- Protezione amperometrica a riarmo automatico incorporata
- Condensatore permanente inserito
- Isolamento Classe F
- Protezione IP 68
- Cavo alimentazione 10 mt.
- Galleggiante di serie

MATERIALI
- Maniglia Polipropilene
- Corpo pompa Polipropilene
- Girante Noryl
- Cassa motore Acciaio Inox
- Albero motore Acciaio Inox
- Doppia tenuta meccanica in camera d'olio

OPERATING CONDITIONS
- *Liquid temperature up to 35°C (for home use according to EN 60335-2-41) Temperature max. liquid: 35°C (for other uses)*
- *Submersion depth 5 mt.*
- *Grain size inlet Ø 4 mm*
- *Min. suction level 20 mm*

MOTOR
- *Built-in overload motor protector with automatic reset*
- *Permanent split capacitor*
- *Insulation Class F*
- *Protection IP 68*
- *Power cable 10 mt.*
- *Standard floater*

MATERIALS
- *Handle Moplen*
- *Pump body Moplen*
- *Impeller Noryl*
- *Motor casing Stainless Steel*
- *Shaft with rotor Stainless Steel*
- *Double mechanical seal in oil chamber*

TIPO - *TYPE*	SDC 250-SW	SDC 450-SW
P1	300 W	450 W
Voltage	230 V	230 V
Frequency	50 Hz	50 Hz
Ampere	1,4 A	2,1 A
Q max.	120 l/1'	140 l/1'
H max.	5,5 m	8,5 m
DNM	1"	1"
Dimensions (P x L x H)	206 x 231 x 335 mm	206 x 231 x 335 mm
Weight	4,5 kg	4,9 kg

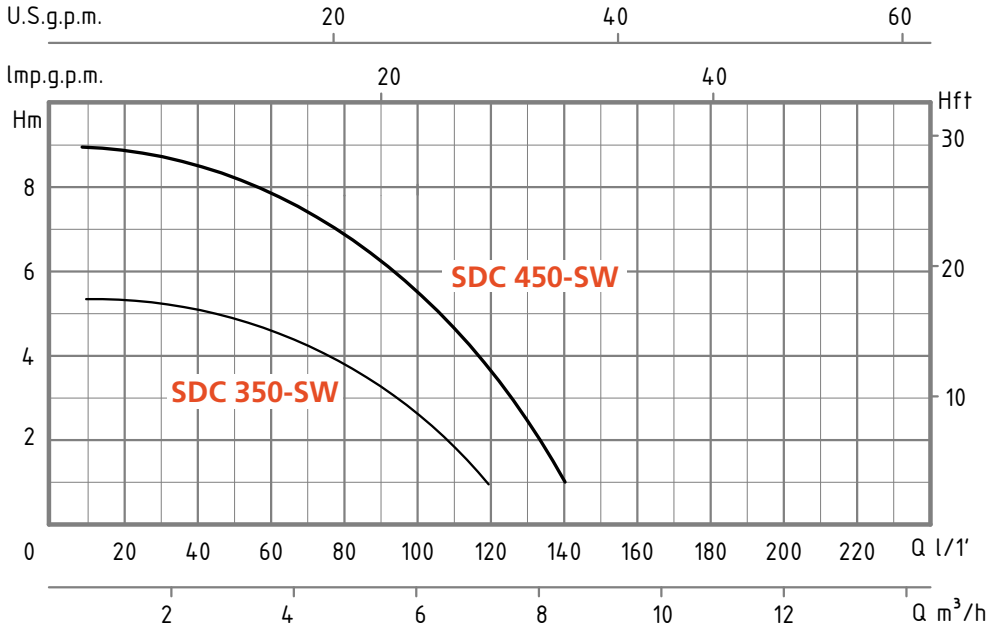

© Speroni S.p.A., Castelnovo di Sotto (Reggio Emilia), 2026