
Mechanical Diaphragm Pump
Kosmo MM2 Series

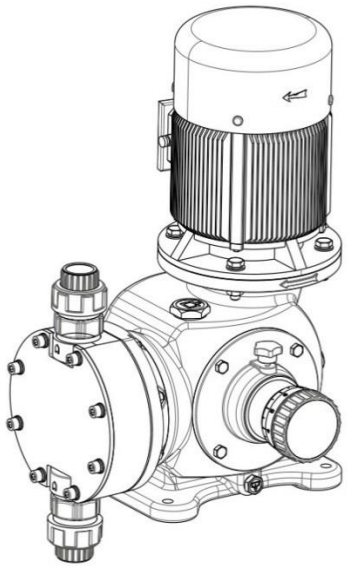

1. Main technical characteristics

- Flow Rate up to 2.300 l/h
- Pressure up to 10 bar
- Mechanically actuated PTFE diaphragm
- Flow rate adjustment from 0 to 100%
- Stroke Rate: 43 / 86 / 131 / 175 strokes/minute
- Stroke Length: 7 / 8 / 9 / 15 mm
- Diaphragm Diameter: 124 / 140 / 157 / 179 mm
- Motor: 0.55 / 0.75 / 1.1 kW
- Maximum temperature of pumped liquid: 40 °C
- Range of ambient temperature: 5 ÷ 55 °C
- Stroke adjustment with locking system
- Enclosure Protection Class: IP55
- Material of Pump Head:
  - SS 316L
  - PVDF

2. General features

- The Kosmo Series dosing pumps offer a high level of reliability with outstanding value for applications up to 10 Bar and flow rates up to 2.300 l/h.
- A range of dosing pumps that are compact, lightweight, robust and simple designed for low discharge pressures, durability and cost effectiveness, mainly used in water treatment and in the food industry in clean-in-place applications. Designed to provide reduced overall operating costs over time, the mechanically-actuated PTFE diaphragm increases diaphragm life by eliminating the stresses inherent in most pump designs.
- Kosmo models are multipurpose pumps and can handle all known reagents. They are recommended for continuous service and can run dry without any damage to the pump.
- Kosmo pumps incorporate a variable eccentric system minimizing pulsation and shock.
- Kosmo dosing pumps consists of durable, metallic housing designed to withstand tough environments and suitable for a large number of industrial uses other than water treatment, such as the injection of reagents at medium pressure.
- Kosmo pumps have an adjustment of flow rate while running or stopped from 0 to 100%, with a maximum temperature of pumped liquid up to 40 °C aimed at delivering exceptional performance across a wide range of flow and pressure environments.

Technical data can be changed without notice.

3. Codification

KOSMO - KEY TO MODEL NUMBER

Field 1	Field 2	Field 3	Field 4	Field 5	Field 6	Field 7	Field 8	Field 9	Field 10	Field 11	Field 12
M	M2	F	124	D	21	C	4	0	0	0	0

Field 1	model
Field 2	mechanism type
Field 3	stroke lenght
Field 4	diameter
Field 5	stroke/min
Field 6	pump head
Field 7	motor power
Field 8	motor type
Field 9	customization
Field 10	market
Field 11	stroke reg.
Field 12	optional

Field 1	**model**		
	M	**Mechanical Return DIAPHRAGM**	
Field 2	**mechanism type**		
	M1	M1 Mechanical return	MM1
	M2	M2 Mechanical return	MM2
Field 3	**stroke lenght**	**Stroke lenght [mm]**	
	A	2	MM1
	C	4	MM1
	D	6.4	MM1
	E	7.4	MM1
	F	7	MM2
	G	8	MM2
	H	9	MM2
	I	15	MM2
Field 4	**diameter**	**Diaphragm [mm]**	
	065	65	MM1
	096	96	MM1
	124	124	MM1 / MM2
	140	140	MM1 / MM2
	157	157	MM2
	179	179	MM2
Field 5	**stroke/min**	**Strokes / minute**	
	A	24:1 58	MM1
	B	18:1 78	MM1
	C	12:1 116	MM1
	D	32:1 43	MM2
	E	32:2 86	MM2
	F	32:3 131	MM2
	G	32:4 175	MM2

Field 6	pump head	DIAPHRAGM - Standard Execution				
		head	**diaphragm**	**valve**	**seat**	**O-Ring**
	21 / 24	SS316L	PTFE	SS316L	SS316L	FPM / EPDM
	41 / 44	PVDF	PTFE	CERAMIC	PVDF	FPM / EPDM

Field 7	motor power	**kW**	**supply**	**phase**	**size**
	0	Without motor			
	A	0.25	230/400 Vac	3	71-B5/ MM1
	B	0.37	230/400 Vac	3	71-B5/ MM1
	C	0.55	230/400 Vac	3	80-B5/ MM2
	D	0.75	230/400 Vac	3	80-B5/ MM2
	E	1.10	230/400 Vac	3	90S-B5/ MM2

Using the 60 Hz 3phases motor the performances of the pumps will be as follows:
Pressure: -20% - Flow Rate: +20%

Field 8	motor type		
	0	Without motor	
	2	2/3	
	4	4/3	230/400Vac, 50/60Hz, TEFC (Totally Enclosed Fan-Cooled)
	6	6/3	
	3	2/1	
	5	4/1	230Vac, 50Hz, TEFC (Totally Enclosed Fan-Cooled)
	7	6/1	
Field 9	customization		
	0	Standard (or without motor)	
	I	Inverter	
	S	Forced Ventilation	
	X	Flame-Proof (Exd II B T4)	
	V	Flame-Proof (Exd II B T4) + Forced Ventilation	
Field 10	market		
	0	Standard	
	6	Asian market	
	7	Brasilian market	
	8	Chinese market	
Field 11	stroke reg.		
	0	Manual	
	A		
Field 12	optional		
	0	Standard	
	A		

Technical data can be changed without notice.
EU_MM2 Kosmo_rev 2.3

4. Specification


KOSMO MM2 Series - EQUIPPED WITH STANDARD MOTOR										
Model	Diameter (mm)	Stroke Length (mm)	Stroke Rate	Flow Rate [l/h]	Max Pressure (bar)	Connections		Motor	Gross Weight (Kg)	Wooden Box L W H (mm)
						SS316L	PVDF	kW/pole	SS316L / PVDF	SS316L / PVDF
MM2F124D**C40000	124	7	43	80	10	BSPf 3/4"	BSPf 3/4"	0.55/4	56	700 X 500 X 750
MM2F124F**C40000			131	250						
MM2G124G**C40000		8	175	450						
MM2G140G**C40000	140			600	7	BSPf 1"	BSPf 1"		60	
MM2H157G**C40000	157	9		1.000	4					
MM2I179F**D40000	179	15	131	1.600		BSPf 1 1/2"	BSPf 1 1/2"	0.75/4	68	
MM2I179G**E40000			175	2.300				1.1/4		

1) (**) Available wetted parts: SS316L (21/24) and PVDF (41/44) ;
2) In addition to the STD motor, it is also can be equipped with VSD motor (Variable Speed Drive) or Flame-Proof motor (Exd IIB T4);
3) Tested with water @ 20°C @ 50 Hz; Flow rate values with motor at 50Hz. Multiply by 1.2 for 60 Hz.

5. Liquid End Material

Material	Liquid End Body			
	21	41	24	44
Pump Head	SS 316L	PVDF	SS 316L	PVDF
Diaphragm	PTFE		PTFE	
Seal	FPM		EPDM	
Ball	SS 316L	Ceramic	SS 316L	Ceramic
Ball Seat		PTFE		PTFE


6. Performance curve P [barg] - Q [L/h]

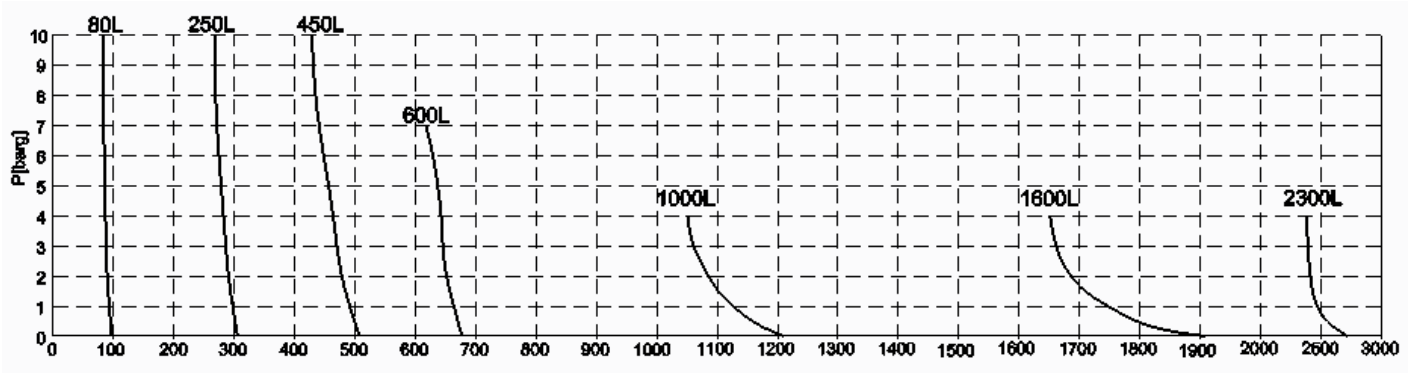


Technical data can be changed without notice.

7. Flow rate with Viscous liquids

The MM2 viscosity performance is compared to the water @ 20°C, @max pressure rate; the trail pilot fluid for the viscosity test has been a PAM (polyacrylamide flocculant) polymer.

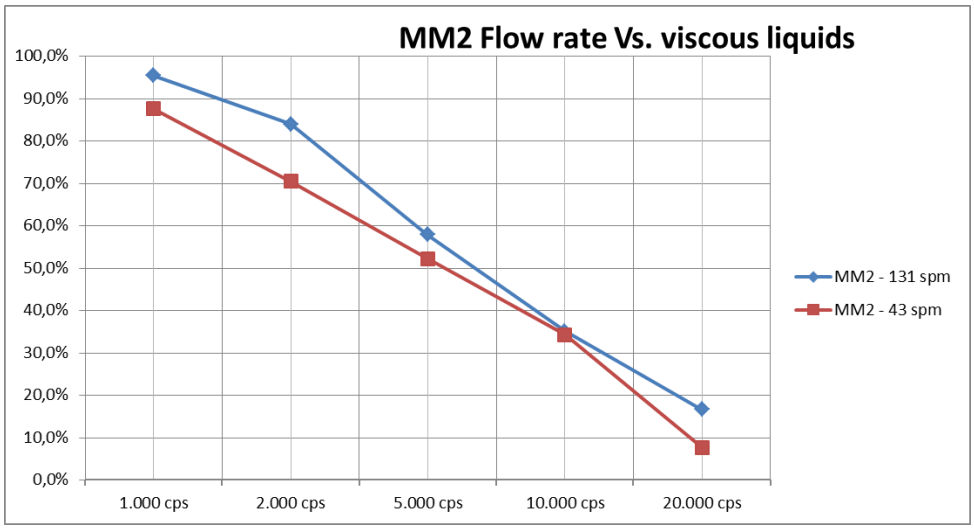

8. Installation Drawing

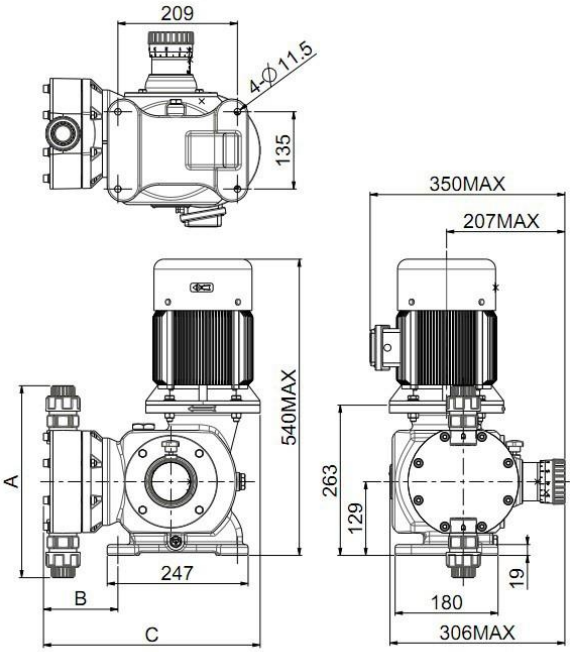

MM2 Pump Head Material	Diaphragm dia. 124mm				Diaphragm dia. 140mm				Diaphragm dia. 157mm				Diaphragm dia. 179mm			
	Connection	A	B	C	Connection	A	B	C	Connection	A	B	C	Connection	A	B	C
PVDF	BSPf 3/4"	293	123	372	BSPf 1"	316	129	377	BSPf 1"	334	130	379	BSPf 1 1/2"	424	148	395
SS316L	BSPf 3/4"	216	108	357	BSPf 1"	251	130	378	BSPf 1"	295	132	381	BSPf 1 1/2"	382	160	407

9. Painting requirements

The anti-corrosion painting process for dosing pump applications requires an entire coating thickness of between 0.06mm and 0.20mm.

Technical data can be changed without notice.
EU_MM2 Kosmo_rev 2.3