DRAINMASTER

ELETTROPOMPE SOMMERSE PER ACQUE CARICHE
SUBMERSIBLE PUMPS FOR DIRTY WATER

LIMITI D'IMPIEGO
- Temperatura liquido fino a 35°C
  (per un uso domestico secondo EN 60335-2-41)
  Temperatura max. liquido: 35°C (per altri impieghi)
- Profondità d'immersione 5 mt.
- Passaggio solidi Ø 38 mm
- Livello min. d'aspirazione 30 mm

MOTORE
- Monofase 230V-50Hz
- Protezione amperometrica a riarmo automatico incorporata
- Condensatore permanente inserito
- Isolamento Classe F
- Protezione IP 68
- Cavo alimentazione 10 mt.
- Galleggiante di serie

MATERIALI
- Maniglia Polipropilene
- Corpo pompa Polipropilene
- Girante Noryl
- Cassa motore Acciaio Inox
- Albero motore Acciaio Inox
- Tenuta meccanica V-Seal

OPERATING CONDITIONS
- *Liquid temperature up to 35°C*
  (for home use according to EN 60335-2-41)
  Temperature max. liquid: 35°C (for other uses)
- *Submersion depth 5 mt.*
- *Grain size inlet Ø 38 mm*
- *Min. suction level 30 mm*

MOTOR
- *Single-phase 230V-50Hz*
- *Built-in overload motor protector with automatic reset*
- *Permanent split capacitor*
- *Insulation Class F*
- *Protection IP 68*
- *Power cable 10 mt.*
- *Standard floater*


MATERIALS
- *Handle Moplen*
- *Pump body Moplen*
- *Impeller Noryl*
- *Motor casing Stainless Steel*
- *Shaft with rotor Stainless Steel*
- *Mechanical V-Seal*







TIPO - *TYPE*	DRAINMASTER 850	DRAINMASTER 1100	DRAINMASTER 1300
P1	850 W	1100 W	1300 W
Voltage	230 V	230 V	230 V
Frequency	50 Hz	50 Hz	50 Hz
Ampere	3,3 A	3,8 A	4,5 A
Q max.	350 l/1'	400 l/1'	450 l/1'
H max.	8,5 m	9 m	10,5 m
DNM	2"	2"	2"
Dimensions (P x L x H)	251 x 255 x 455 mm	251 x 255 x 455 mm	251 x 255 x 455 mm
Weight	7 kg	7,3 kg	7,8 kg

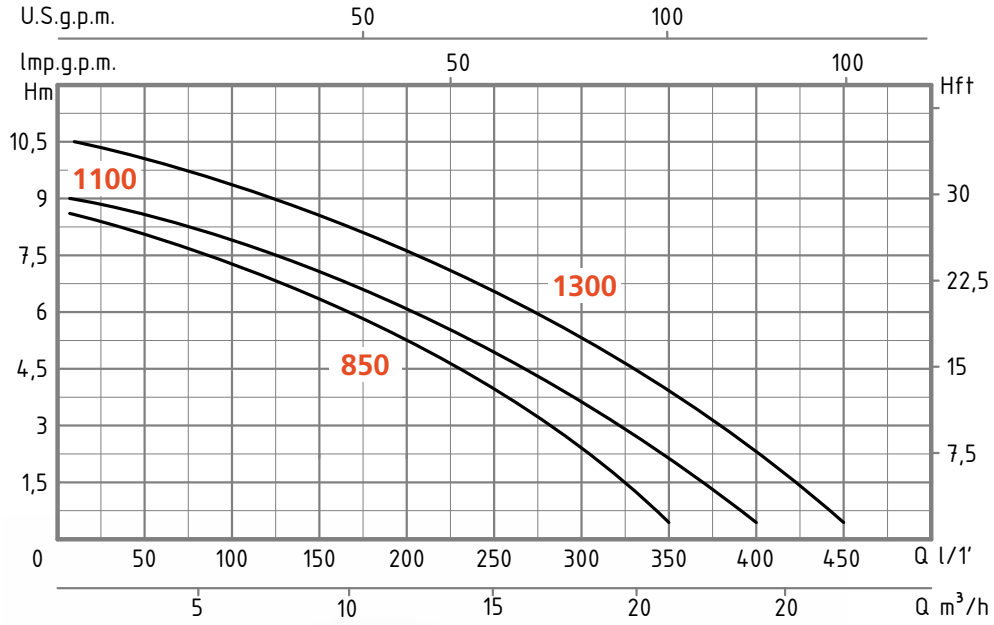



© Speroni S.p.A., Castelnovo di Sotto (Reggio Emilia), 2026